




## Lanturi calibrate tractiune DIN766

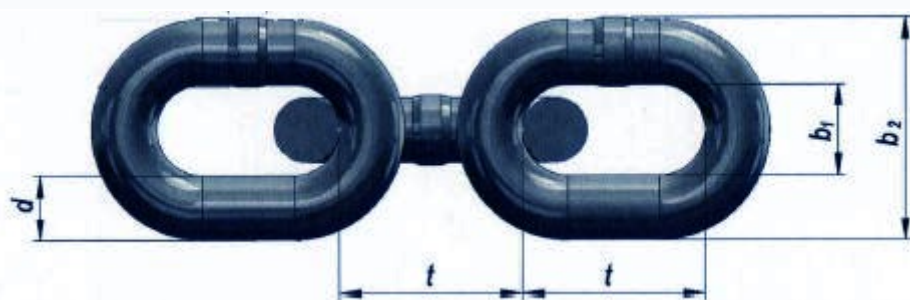

Zincat, vopsit,  
negru natural

Diametru d	Pas t	Latime		Greutate	Sarcina		
		b1 min	b2 max		Sarcina de lucru	Sarcina test	Sarcina la rupere
mm	mm	mm	mm	kg/m	kg	kN	kN
4	16	4,8	13,6	0,32	200	5,0	8,0
5	18,5	6	17	0,5	320	8,0	12,5
6	18,5	7,2	20,4	0,8	400	10,0	16,0
7	22	8,4	23,8	1,1	630	16,0	25,0
8	24	9,6	27,2	1,4	800	20,0	32,0
9	27	10,8	30,6	1,8	1 000	25,0	40,0
10	28	12	36	2,3	1 250	32,0	50,0
11	31	13,2	40	2,7	1 600	40,0	63,0
13	36	15,6	47	3,9	2 000	50,0	80,0
16	45	19,2	58	5,8	3 200	80,0	125,0
18	50	21,6	65	7,4	4 000	100,0	160,0
20	56	24	72	9,0	5 000	125,0	200,0
23	64	27,6	83	12,0	6 300	160,0	250,0
26	73	31,2	94	15,0	8 000	200,0	320,0
28	78	33,6	101	18,0	10 000	250,0	400,0
30	84	36	108	20,0	11 200	280,0	450,0
32	90	38,4	115	23,0	12 500	320,0	500,0
36	101	43,2	130	29,0	16 000	400,0	630,0
40	112	48	144	35,0	20 000	500,0	800,0
42	118	50	151	40,0	22 400	560,0	900,0