




## Lanturi calibrate tractiune DIN766

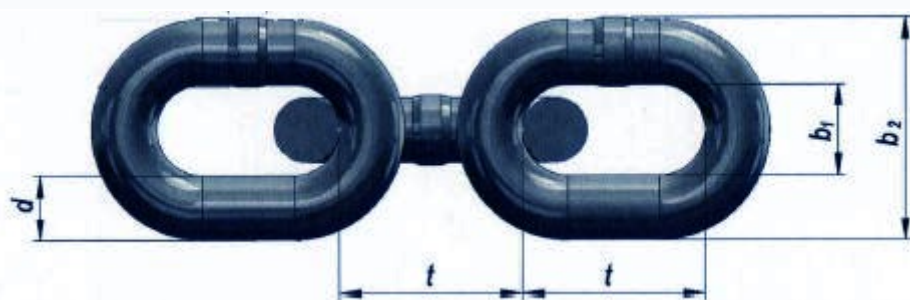


Zincat, vopsit,  
negru natural

Diametru d	Pas t	Latime		Greutate	Sarcina		
		b1 min	b2 max		Sarcina de lucru	Sarcina test	Sarcina la rupere
mm	mm	mm	mm	kg/m	kg	kN	kN
4	16	4,8	13,6	0,32	200	5,0	8,0
5	18,5	6	17	0,5	320	8,0	12,5
6	18,5	7,2	20,4	0,8	400	10,0	16,0
7	22	8,4	23,8	1,1	630	16,0	25,0
8	24	9,6	27,2	1,4	800	20,0	32,0
9	27	10,8	30,6	1,8	1 000	25,0	40,0
10	28	12	36	2,3	1 250	32,0	50,0
11	31	13,2	40	2,7	1 600	40,0	63,0
13	36	15,6	47	3,9	2 000	50,0	80,0
16	45	19,2	58	5,8	3 200	80,0	125,0
18	50	21,6	65	7,4	4 000	100,0	160,0
20	56	24	72	9,0	5 000	125,0	200,0
23	64	27,6	83	12,0	6 300	160,0	250,0
26	73	31,2	94	15,0	8 000	200,0	320,0
28	78	33,6	101	18,0	10 000	250,0	400,0
30	84	36	108	20,0	11 200	280,0	450,0
32	90	38,4	115	23,0	12 500	320,0	500,0
36	101	43,2	130	29,0	16 000	400,0	630,0
40	112	48	144	35,0	20 000	500,0	800,0
42	118	50	151	40,0	22 400	560,0	900,0



## Lanturi calibrate tractiune DIN764


Zincat, vopsit,  
negru natural

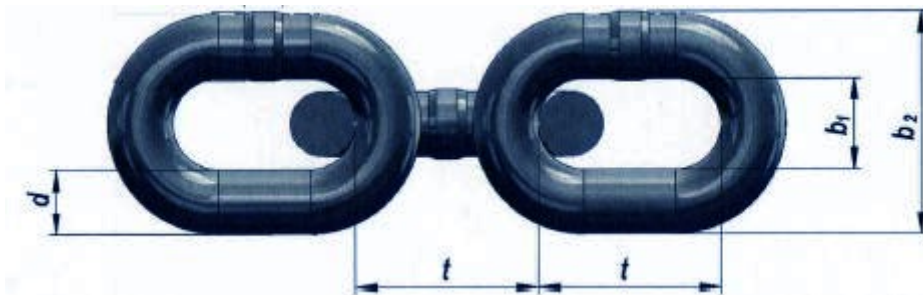

Diametru	Pas	Latime		Greutate	Sarcina		
		b1 min	b2 max		Sarcina de lucru	Sarcina test	Sarcina de rupere
d	t						
mm	mm	mm	mm	kg/m	kN	kN	kN
10	35	14	36	2,00	13	32,0	50,0
13	45	18	47	3,50	21	53,0	85,0
16	56	22	58	5,20	32	80,0	125,0
18	63	24	65	6,50	40	100,0	160,0
20	70	27	72	8,20	50	125,0	200,0
23	80	31	83	11,00	67	170,0	265,0
26	91	35	94	14,00	85	212,0	340,0
28	98	36	101	16,50	100	250,0	400,0
30	105	39	108	19,00	112	280,0	450,0
33	115	43	119	22,50	132	335,0	530,0
36	126	47	130	26,50	160	400,0	630,0
39	136	51	140	31,00	190	475,0	750,0
42	147	55	151	36,00	224	560,0	900,0

## Lanturi necalibrate tractiune DIN763


Zincat, vopsit,  
negru natural

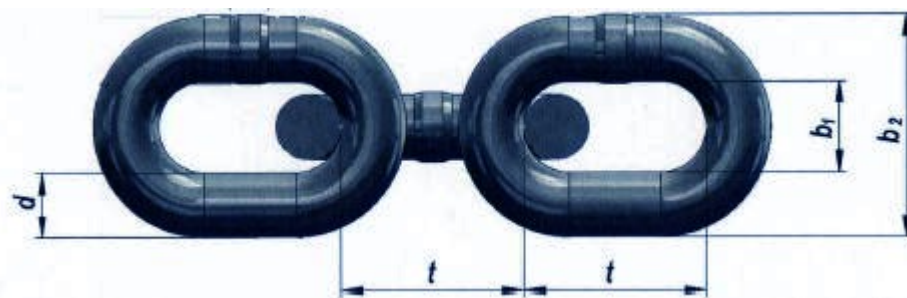

Diametru	Pas	Latime		Greutate	Sarcina		
		b1 min	b2 max		Sarcina de lucru	Sarcina test	Sarcina la rupere
d	t	mm	mm	kg/m	kg	kN	kN
4	32	7,2	16,8	0,27	100	2,5	6,3
5	35	9	21	0,43	160	4,0	10,0
6	42	10,8	25,2	0,63	200	5,0	12,5
7	49	12,6	29,4	0,86	300	7,5	19,0
8	52	14,4	33,6	1,10	400	10,0	25,0
10	65	18	42	1,75	630	16,0	40,0
13	82	23,4	54,6	2,95	1 000	25,0	63,0
16	100	28,8	67,2	4,45	1 600	40,0	100,0

## Lanturi calibrate tractiune DIN762


Zincat, vopsit,  
negru natural

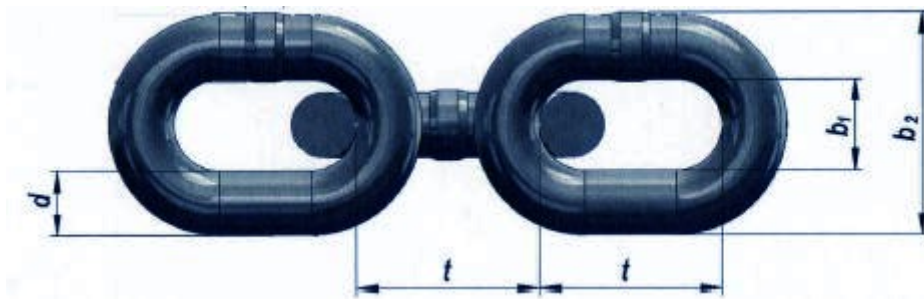

Diametru d	Pas t	Latime		Greutate kg/m	Sarcina		
		b1 min mm	b2 max mm		Sarcina de lucru kN	Sarcina test kN	Sarcina la rupere kN
10	50	14	36	1,80	10	25,0	50,0
13	65	18,2	46,8	3,10	16	40,0	80,0
16	80	22,4	57,6	4,70	25	63,0	125,0
18	90	25	65	6,00	32	80,0	160,0
20	100	28	72	7,40	40	100,0	200,0

## Lanturi miniere DIN 22252

Zincat  
negru natural

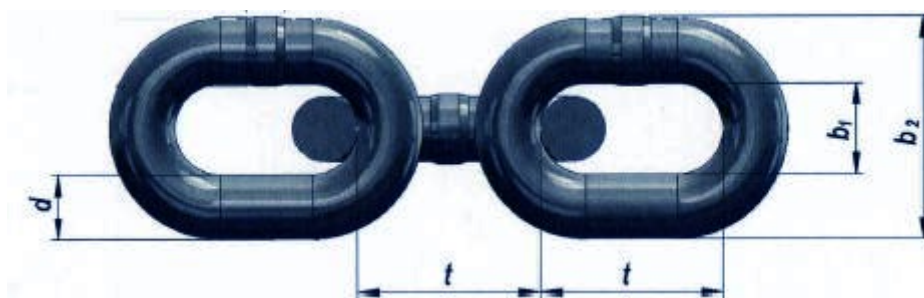

Diametru d	Pas t	Latime b1 min	Latime b2 max	Greutate	Sarcina test	Sarcina la rupere
mm	mm	mm	mm	kg/m	kN	kN
14	50	17	48	4,0	185	246
16	64	20	55	4,9	260	320
18	64	21	60	6,6	305	407
19	64,5	22	63	7,6	340	454
22	86	26	73	9,5	456	608
24	86	28	79	11,6	543	724
24	87,5	28	79	11,5	543	724
26	92	30	85	13,7	637	850
30	108	34	97	18,0	848	1 130
34	126	38	109	22,7	1 090	1 450
38	137	42	122	29	1 360	1 820