


Lanturi calibrate palane si electropalane EN818-7

Zincat, vopsit,
negru natural

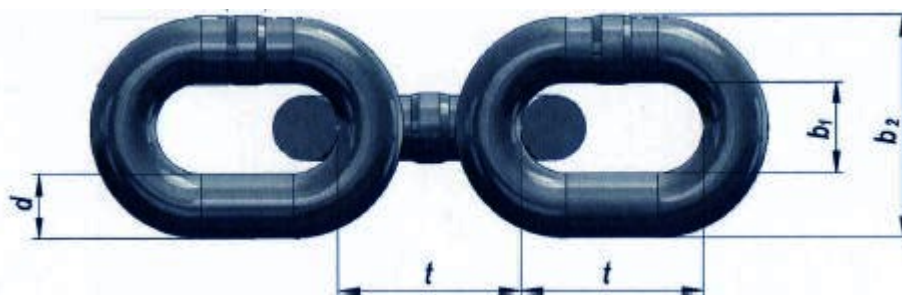

Diametru	Pas	Latime		Greutate	Sarcina de lucru		Sarcina test	Sarcina la rupere
		Interior	Exterior		motor	manual		
d	t	b1 min	b2 max					
mm	mm	mm	mm	kg/m	kg	kg	kN	kN
4	12	4,8	13,6	0,35	320	500	10	20,1
5	15	6,0	16,9	0,54	630	750	15	32
5	18,5	6,0	16,9	0,50	630	750	15	32
6	18	7,2	20,2	0,80	900	1 120	22,4	45
6	18,5	7,2	20,2	0,80	900	1 120	22,4	45
7	21	8,4	23,6	1,10	1 250	1 500	30	60
7	22	8,4	23,6	1,10	1 250	1 500	30	60
8	24	9,6	27,0	1,40	1 600	2 000	40	80
9	27	10,8	30,4	1,80	2 000	2 500	50	100
10	28	12,0	34,0	2,20	2 500	3 200	63	125
11	31	13,2	37,4	2,70	3 000	3 750	75	150
13	36	15,6	44,2	3,80	4 250	5 300	106	212
16	45	19,2	54,4	5,70	6 300	8 000	160	320
18	50	21,6	61,2	7,30	8 000	10 000	200	400
20	60	24,0	68,0	8,80	10 000	12 500	250	500
22	66	26,4	75,0	10,70	12 500	16 000	320	630