


Lanturi de ridicare necalibrate EN 818-2 grad 80

Zincat, vopsit,
negru natural

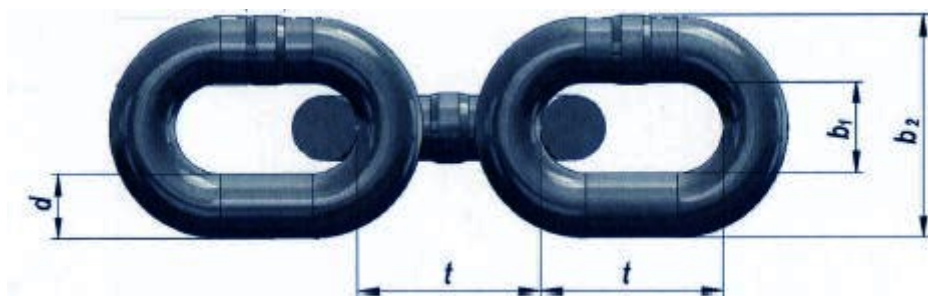


Pagina 7 - Catalog - Lanturi industriale 2015

Diametru	Pas	Latime		Greutate	Sarcina de lucru	Sarcina	
		Inside	Outside			Sarcina test	Sarcina de rupere
d	t	b1 min	b2 max				
mm	mm	mm	mm	kg/m	kg	kN	kN
6	18	7,8	22,2	0,8	1 120	28,3	45,2
7	21	9,1	25,9	1,1	1 500	38,5	61,6
8	24	10,4	29,6	1,4	2 000	50,3	80,4
10	30	13,0	37,0	2,2	3 150	78,5	126,0
13	39	16,9	48,1	3,8	5 300	133,0	212,0
16	48	20,8	59,2	5,7	8 000	201,0	322,0
18	54	23,4	66,6	7,3	10 000	254,0	407,0
19	57	24,7	70,3	8,1	11 200	284,0	454,0
20	60	26,0	74,0	9	12 500	314,0	503,0
22	66	28,6	81,4	10,9	15 000	380,0	608,0
26	78	33,8	96,2	15,2	21 200	531,0	849,0
32	96	41,6	118,0	23	31 500	804,0	1 290,0

Lanturi de ridicare necalibrate EN 818-7 grad 100

Zincat, vopsit,
negru natural

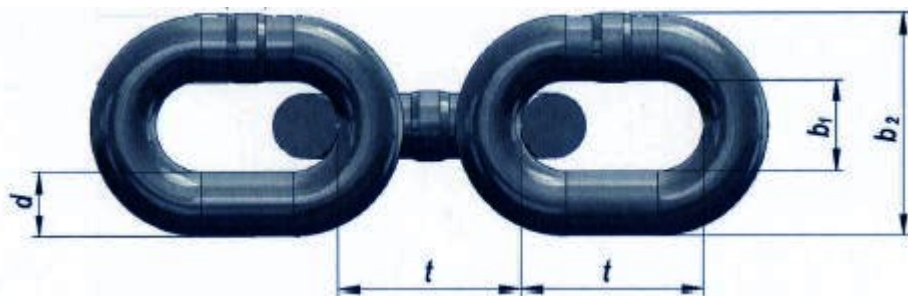

Diametru	Pas	Latime		Greutate	Sarcina de lucru	Sarcina	
		Interior	Exterior			Sarcina test	Sarcina la rupere
d	t	b1 min	b2 max				
mm	mm	mm	mm	kg/m	t	kN	kN
4	12	5,2	14,8	0,36	0,63	15,7	25,1
5	15	6,5	18,5	0,56	1,0	24,5	39,3
6	18	8,5	22,5	0,8	1,4	35,3	56,5
7	21	9,1	25,9	1,1	1,9	48,1	77,0
8	24	10,4	29,6	1,5	2,5	62,8	101,0
10	30	13,0	37,0	2,3	4,0	98,2	157,0
13	39	16,9	48,1	3,9	6,7	166,0	265,0
16	48	20,8	59,2	5,8	10,0	251,0	402,0
18	54	23,4	66,6	7,4	12,5	318,0	509,0
19	57	24,7	70,3	8,1	14,0	354,0	567,0
20	60	26,0	74,0	9,0	16,0	393,0	628,0
22	66	28,6	81,4	11,0	19,0	475,0	760,0
23	69	29,9	85,1	12,0	20,0	519,0	831,0
26	78	33,8	96,2	15,0	26,5	664,0	1 060,0
32	96	41,6	106	24,3	28,0	1 005,0	1 610,0